



EAZYWOOD
www.easywood.com.my

PIONEER & SPECIALIST
IN COMPOSITE TIMBER PRODUCTS

BAMBOO DECKING



Bamboo Decking



Bamboo Cladding



Bamboo Customizaion

why you choose
EAZYWOOD®?

您为什么选择
EAZYWOOD®
易の木?

- Pioneer & specialist since year 2004 (established & reliable)
超过20年专业经验
- Excellent quality & service
优质产品&服务
- Proven reliable and responsible (>20 years)
可靠+售后服务
- Consistently keeping stocks
长期库存（货）
- Offer most choices / options
提供最多选择



Why Bamboo

China is well known for its large distribution of bamboo forest. There are over 36 million hectare of bamboo forest resources worldwide. Among that, China has over 5.4 million hectare of bamboo forest and over 70% of them are moso bamboo forest.

And bamboo as one of fastest growing grass only needs 4-6 years to be used for commercial production rather than 30 years wood or even longer. It is totally naturally growing without requesting any fertilizer or chemicals, which is very sustainable and eco friendly material.

Besides, moso bamboo itself has very good strength which ensure its product good durability.


Content

Exterior bamboo


- Decking
- Cladding& Ceiling
- Louvers& Lumber
- Customization

Exterior Bamboo Material


Easy wood focuses on exterior bamboo products innovation, the product line ranges from bamboo deck, wall cladding, ceiling, lumber and furniture. And it also can be category by colors-Dark Coffee and Teak color. Dark coffee is realized by 240 degree celsius temperature to physically decompose the nutrition in the bamboo cell . so that it can be used for exterior extremely harsh weather and that is why its color is very luxury and classic. Teak color is realized by 160 degree temperature and Solidify technology to treat the bamboo material so that the color still keeps the natural. With innovative treatment, they are very durable and stable for various applications which are better alternative for the hardwood.

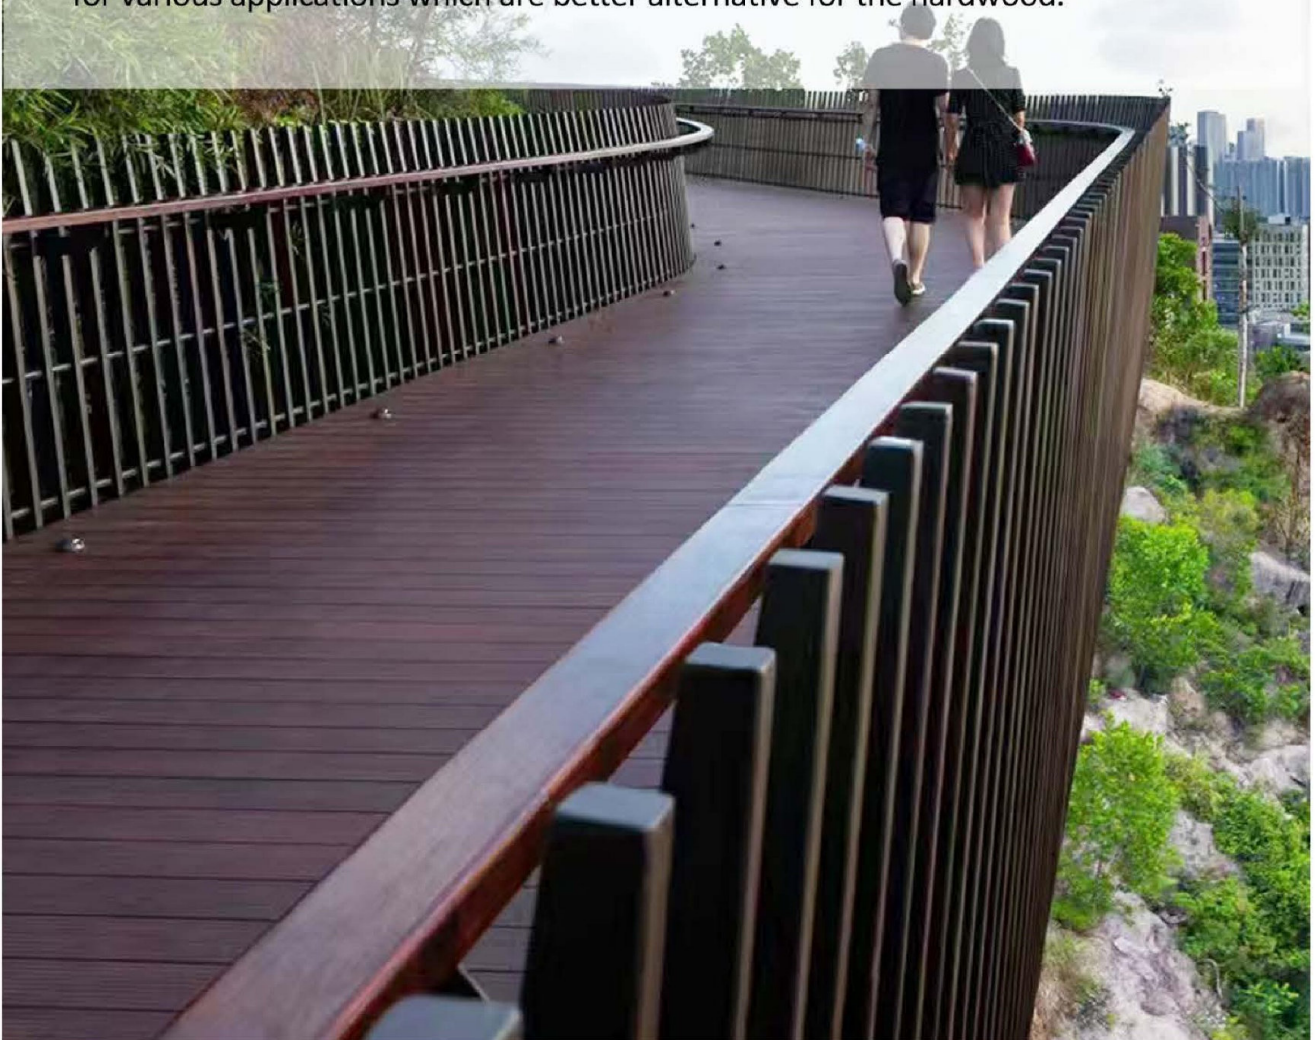

Product category

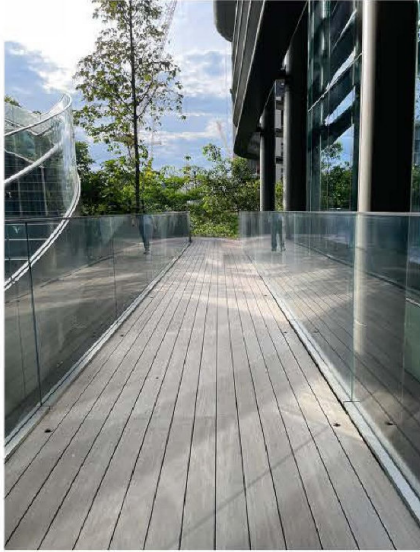


Decking

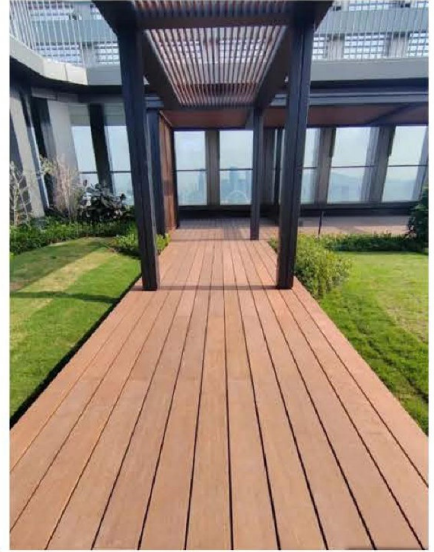


Cladding



Customization

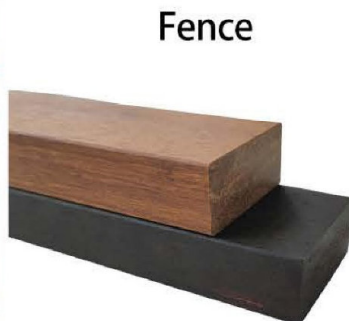


Fence

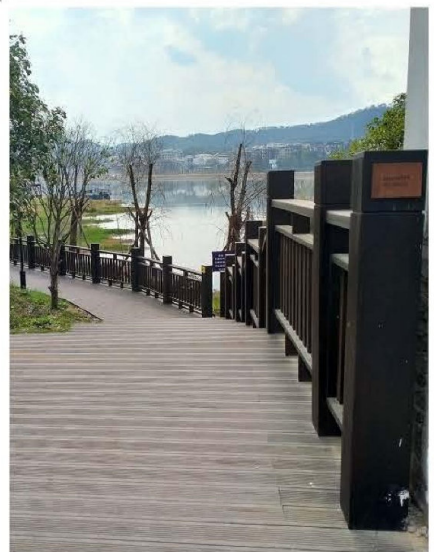

Automatic production

Easy wood takes care of each process carefully. 80% production has reached automatic operation which can largely reduce the defective rate and keep the high stable quality.

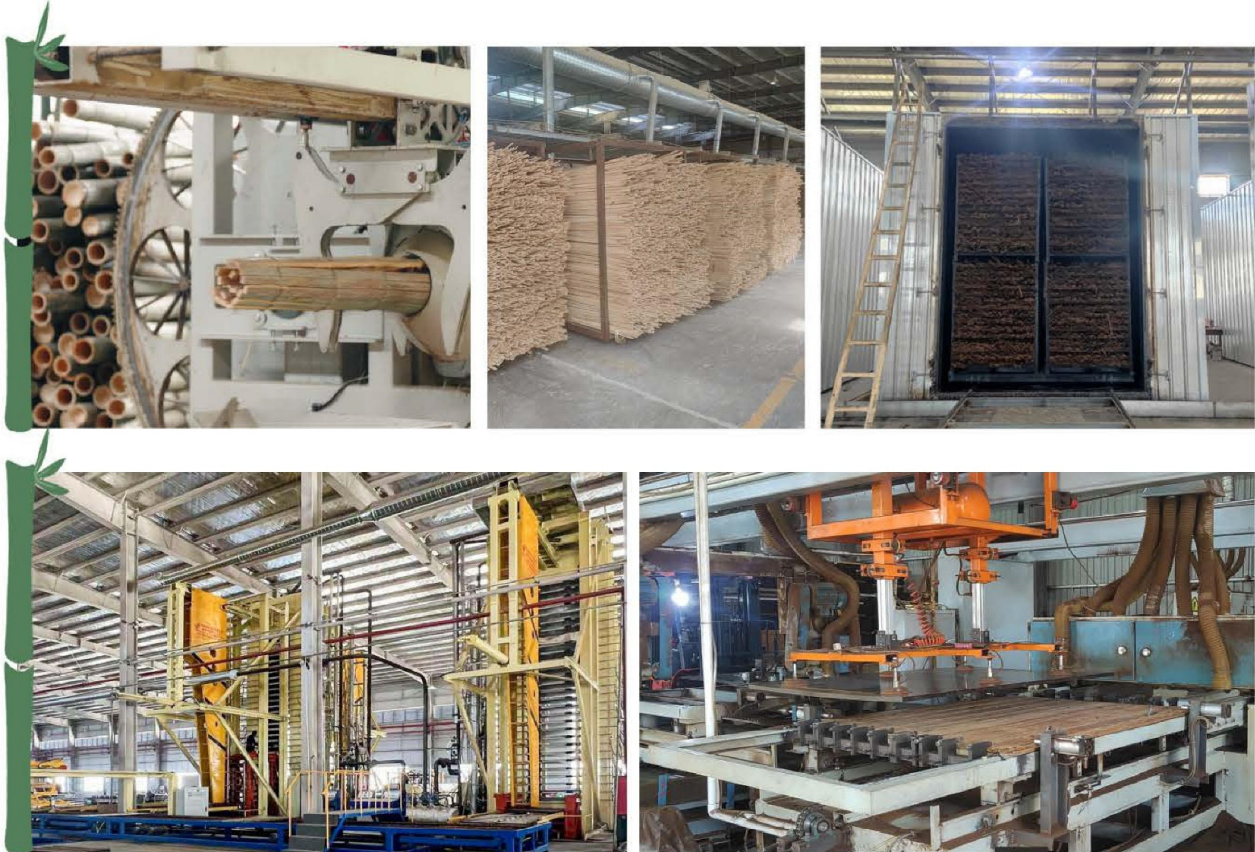

Advantages:

Sustainable,

Moso bamboo can be used at the age of 4-6 rather than 30 years like wood



Highly durable and stable,

Durability: class 1 (highest level)
Stability: 0.04% (width expansion rate)
0% (length expansion rate)



Fungi resistant,

240 degree temperature decompose of nutrition in bamboo cell and solidify technique exclude the food for fungi, the result can be 0-1 class (highest class is 0)



Fire resistant,

Innovative production and high density ensure its excellent level of fire rated.
Class: Bfl (highest class for natural material)




Exterior bamboo decking



With strict production standard and excellent performance, Easy wood Bamboo decking can be widely used in residential and commercial applications like house garden, balcony, swimming pool, park walkways, dock, etc. Its profile decides easy installation with clips which save a lot time and labor cost at the same time.

Surface& Profile

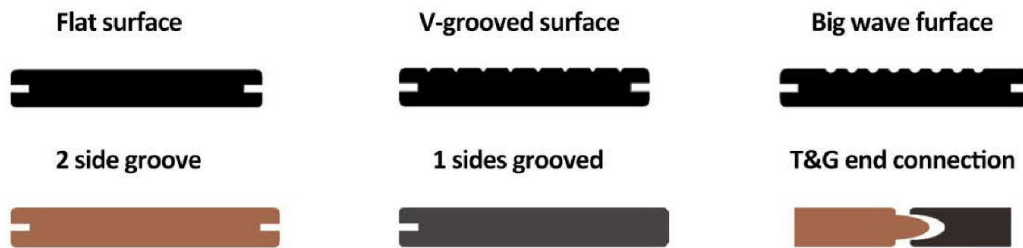

Specification

Length (mm)	Width (mm)	Thickness (mm)	Treatment	Color
1850	100	18	Un-oil	Dark coffee
1860	137	20	Painted	Teak
2000	140	21		
2440	155	30		
	178	40		

Technical data

Density	Bending Strength	MOE	Slip Resistant	Fire Resistant	Mould Resistant
1100-1200	70.9N/mm ²	13490N/mm ²	R10	Bfl-s1	Class 0
g/cm ³	EN-408	EN408	DIN51130	EN13501-1	ASTM G21-15

Exterior bamboo cladding & ceiling



Easy wood designs various profiles to suitable for different wall decoration and ceilings. It can be a good match with decking.

Its sides groove and shiplap profile are very easy for clips installation which saves more time and energy.

Profile

Side Grooved



Non-Grooved



Shiplap




Fluted



Specification

Length (mm)	Width (mm)	Thickness (mm)	Treatment	Color
1860	90	8	Un-oil	Dark coffee
2000	100	12	Painted	Teak
	106	18	Oil	
	120			

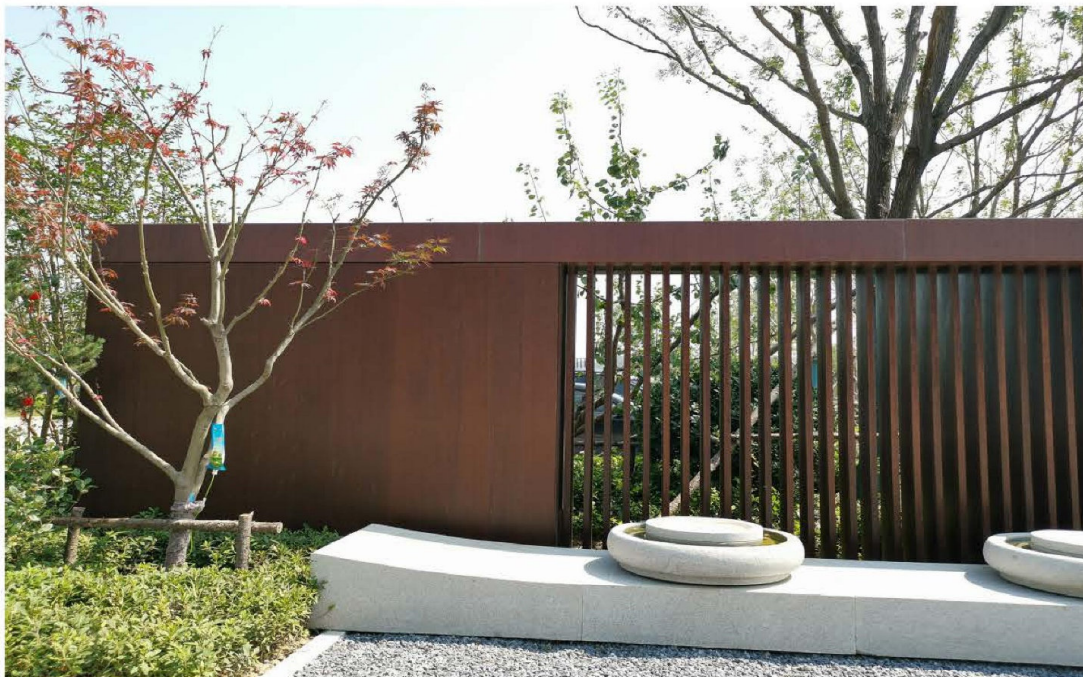


Exterior bamboo louvers& lumber



It is very wide usage of this product since it can be used as the beams, lumbers and louvers for bench, furniture or joist with A grade surface and finishing. Since the bamboo are pressed into big size sheet, different lumber size are available to realize within the range.

Specification

1860*65*20/30/40mm	2000*65*20/30/40mm	2440*65*20/30/40mm
1860*100*20/30/40mm	2000*100*20/30/40mm	2440*100*20/30/40mm
1860*150*20/30/40mm	2000*150*20/30/40mm	2440*150*20/30/40mm
1860*307*20/30/40mm	2000*307*20/30/40mm	2440*307*20/30/40mm

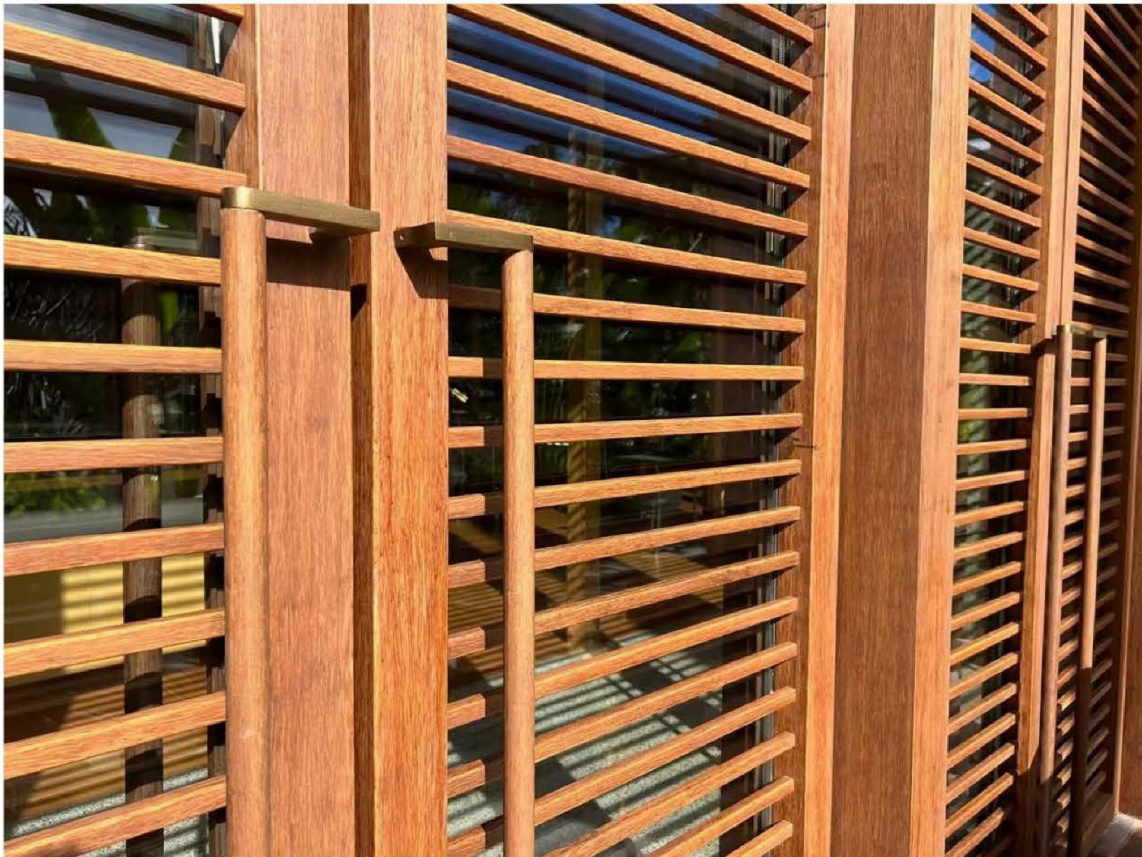

Installation guidance

1. Level the ground in advance,
2. Leave the 1-2 degree slope when fix the support and joist,
3. Leave a certain space at least 100mm from ground to back side of deck boards,
4. Keep the joist span at most 462.5mm,
5. Use clips or direct screw to installation, leave certain gap (about 5mm) between boards,
- 6 Fix the 1st pc of deck board on the joist with the start clip,
7. Use the middle clips to fix the other side of 1st pc of decking on the joist,
8. Fix the 2nd pc of decking with middle clips and all the rest follow the same.

Spare Parts:



Joist




Start clip




Middle clip (I or U shape)

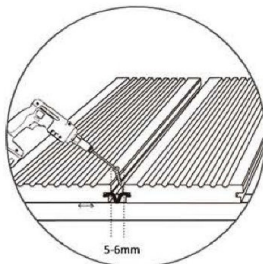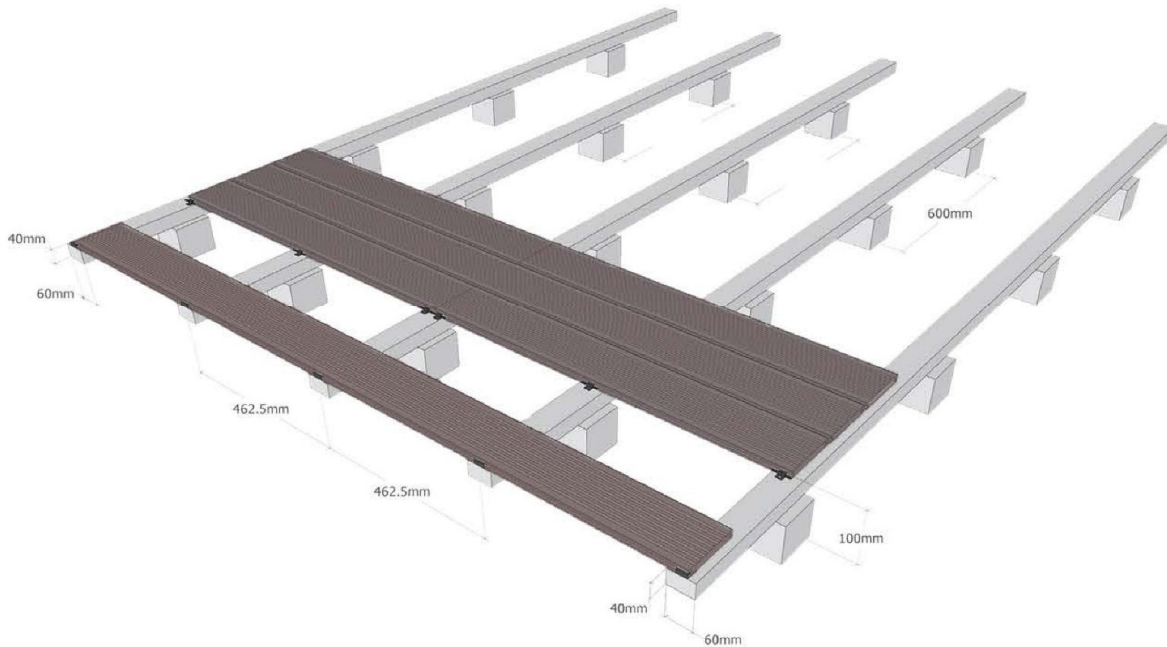


The decking board will have a gap about 5-6mm after installation

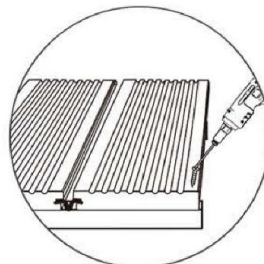

Last Piece of board could use 1 side grooved board, then, use screw to fix

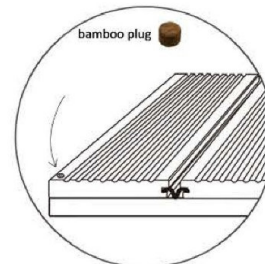

If don't want to see the screw head on board, could use bamboo plug to make up it.

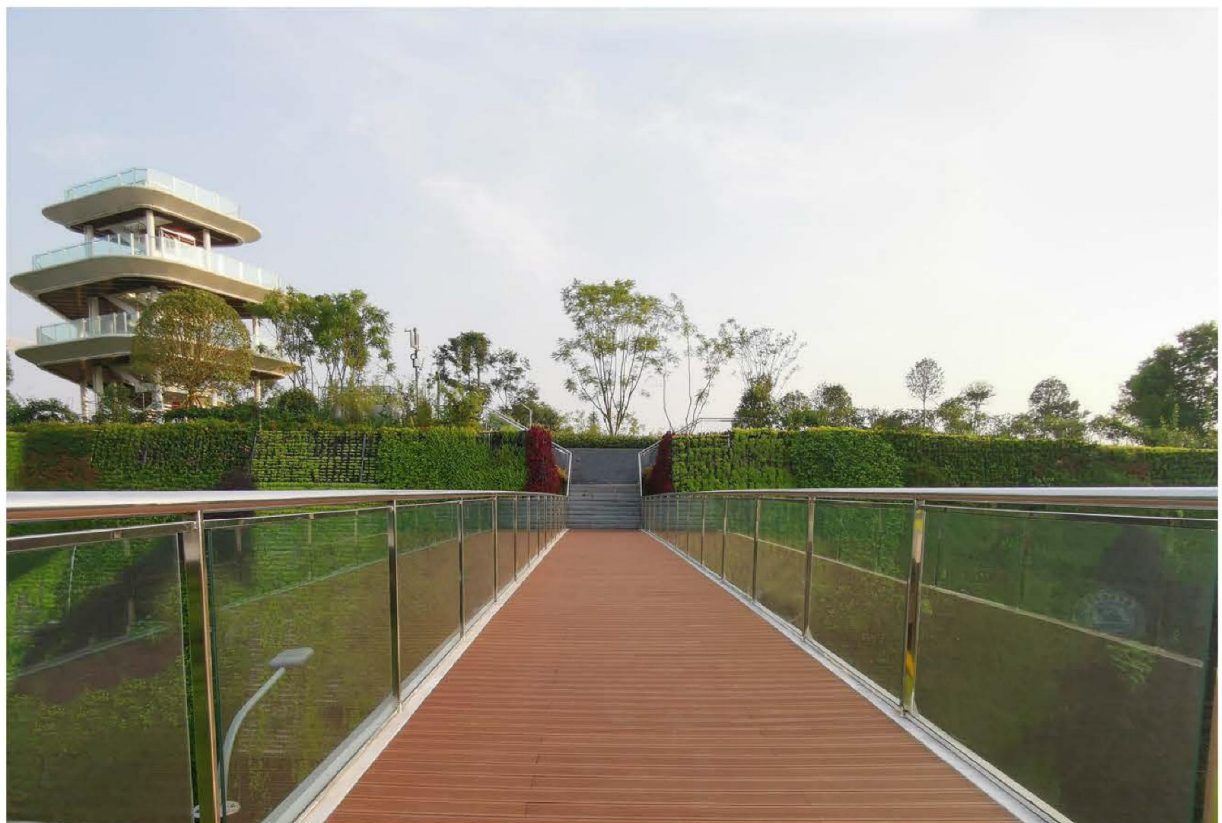


Accessories

	Item	ID	Description	Size (mm)
Decking		EB-DCI	Middle clip I Shape	40*25*10.5
		EB-DCU	Middle clip U shape	27.5*23*10
		EB-DCL	Start clip L shape	31*25*10.5
		EB-DSW	Screw for wood joist	M4*35
		EB-DSS	Screw for steel joist	M4*20
		EB-BP	Bamboo plug	Dia 8.1mm
Cladding		EB-DCI	Clip for side grooved board	40*25*8.5
		EB-DCU	Clip for non- side grooved board	25*20*20mm Dia: 3mm
		EB-DSW	Screw for wood joist	M4*35
		EB-DSS	Screw for steel joist	M4*20

Bamboo customization

Easy wood is not only good at supply high quality standard products, but also happy and able to support on customized demand. We have CNC machines which is very supportive for various shapes and special products like post, handrails or pergola.

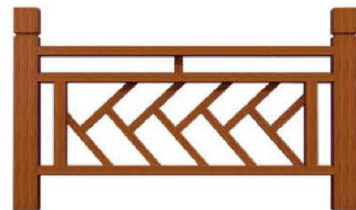

Maintenance

Like other hardwood, Bamboo decking also needs the regular caring.


1. Choose a sunny day for maintenance,
2. Using sweep and water to clean the surface to remove off dirt, leaf, mold, etc.
3. Let it dry fully,
4. Sanding (optional, depending on the maintenance frequency & surface condition),
5. Use the sponge broom to apply water-based oil on the deck,
6. Dry fully and done.

Kind note:

- A. Better the temperature is not higher than 40 degree Celsius.
- B. Not use the high pressure faucet to wash the deck, use the garden water hose with lower pressure.
- C. +/-30g oil are applied per square meters.




New install

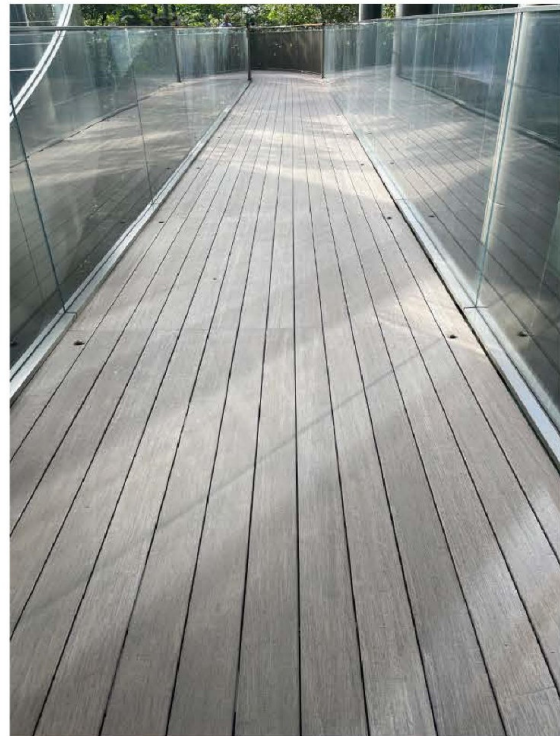

After 6 year use

Projects

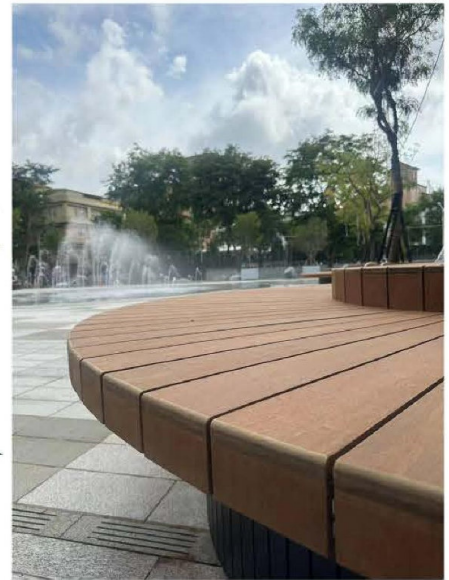



 info@easywood.com.my

 www.easywood.com.my



search for "EAZY WOOD"



www.facebook.com/EAZYWOODMALAYSIA

EASY WOOD SDN. BHD. (877688-W)

MULTI PLANK SDN. BHD. (913566-M)

No. 8, Jalan TPP 5/17, Taman Perindustrian Puchong, 47160 Puchong, Selangor, Malaysia.

Tel : +603 8090 9936 / +6012 487 3050 (admin / account)

EASY WOOD (PENANG) SDN. BHD. (847806-X)

No. 6 & 8, Lorong IKS Bukit Tengah, Taman IKS Bukit Tengah, 14000 Bukit Mertajam, P.Pinang.

Tel : +6012 401 0488 / +6012 427 3050 / +6012 488 3050